
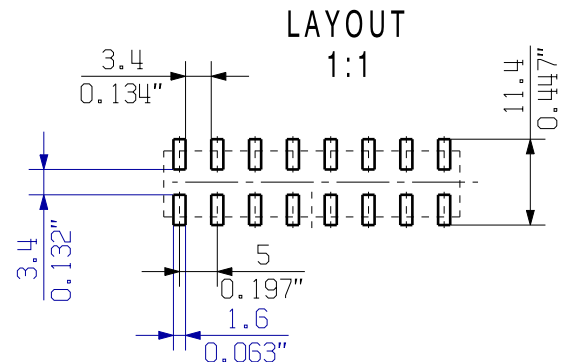
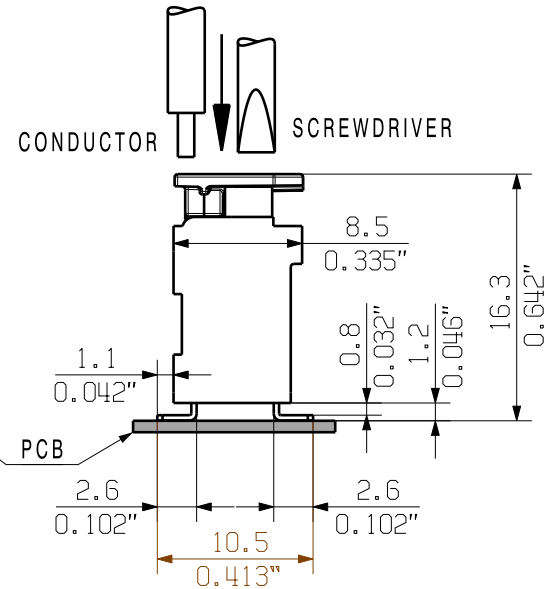


MASSE OHNE TOLERANZ SIND KEINE PRUEFMASSE
DIMS. WITHOUT TOLERANCE ARE NOT CONTROL DIMS.

DIE DEUTSCHE VERSION IST VERBINDLICH
THE GERMAN VERSION IS BINDING

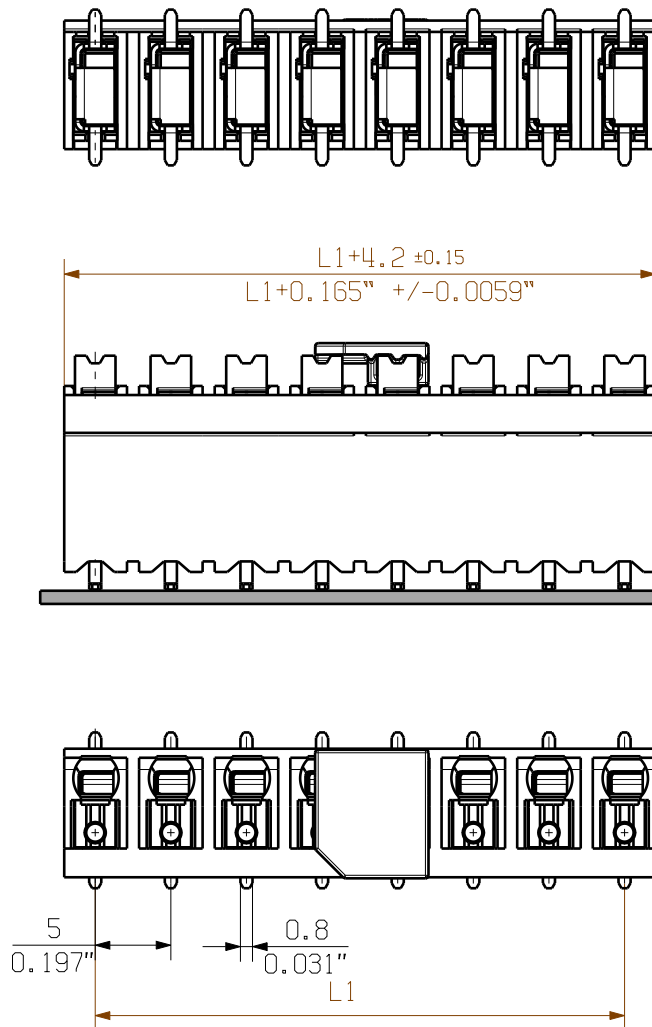

For the mounting on PCBs, it should be noted that the rated data relates only to the PCB components alone.

The necessary creepage and clearance paths must be observed in the relevant equipment standards in accordance with IEC 664 / VDE 0110.

The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3.

Weidmüller PCB components are rated in accordance with the DIN EN 61984 standard, and are valid for its field of application. If the components are used in accordance with the intended purpose, the components will meet all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress.

SHOWN: LSF-SMD 5.00/08/180...

8	35,00	1,378
7	30,00	1,181
6	25,00	0,984
5	20,00	0,787
4	15,00	0,591
3	10,00	0,394
2	5,00	0,197
n	L1 [mm]	L1 [Inch]

	DIN ISO 2768-m	78007/5 09.09.14 HELIS_MA 00	Weidmüller	CAT.NO.: . . .		
		MODIFICATION		C 57991 04		
	DATE	NAME	LSF-SMD 5.00/.. /180... LEITERPLATTENKLEMM PCB TERMINAL			
	DRAWN	13.03.2014				HELIS_MA
	RESPONSIBLE					KRUG_M
SCALE: 2:1	CHECKED	30.09.2014	HELIS_MA	SHEET 01	OF 02 SHEETS	
SUPERSEDES: .	APPROVED		LANG_T	PRODUCT FILE: LSF-SMD	7401	